



## PMMA-Based Anti-Slip Paint

### HEAVY DUTY ANTI-SKID FLOORING TECHNOLOGY


A solvent-free, 3-component anti-slip system that offers fine, medium and coarse aggregate for a suitable textured finish on steel, concrete and other substrates.

This specialist, durable flooring coating delivers excellent grip properties and is suitable for indoor and outdoor use where a sure foothold is required. It's suitable for all conditions, including wet environments.


- Hard dry in just 40 minutes\* (see Data Sheet)
- A tough and durable coating with excellent grip properties
- Choices of fine, medium and coarse aggregate available
- Suitable for internal and external application, including in wet environments
- Excellent resistance to UV and weathering
- Packaged in 10kg container with aggregate supplied as required



HEAVY DUTY ANTI-SKID FLOORING

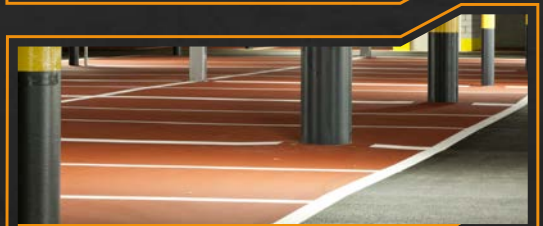

FOR INDOOR AND OUTDOOR USE

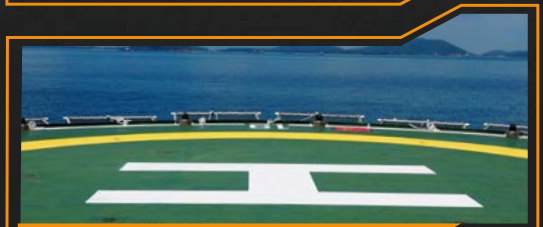

SUITABLE FOR ALL CONDITIONS

+44 (0) 1698 591 635

info@cactusindustrial.com

www.cactusindustrial.com



# PMMA-Based Anti-Slip Paint

## PMMA-BASED ANTI-SLIP PAINT APPLICATION AREAS INCLUDE, BUT ARE NOT LIMITED TO:

- Walkways
- Production Areas
- Warehouse
- Car Parking
- Offshore decks, lay down areas and walkways
- Balcony Waterproofing

### Product Data

Product Description	A solvent-free, 3-component, heavy duty anti-skid flooring system
Volume Solids	100%
Typical Thickness	Minimum 600 microns
Theoretical Coverage	0.6 - 1.1Kg/m <sup>2</sup>

Substrate Temperature	PMMA Catalyst % pbw.	Pot Life approx. min.	Hardening Time approx. min.
0°C	6.0	20	50
+10°C	4.0	20	45
+20°C	2.0	15	40

For substrate temperatures of -10°C, please refer to PMMA Additive LT Technical Data Sheet.

